

## Package size



**WATERPROOF  
WOOD ADHESIVE**

**WOOD  
TO**



### Magnet Adhesive Solution

Room no. 7(4), Shanti Bhuvan Bldg, Soniwadi, Off. Simpholi Road,  
Near Simandar Medical Store, Borivali (W), Mumbai 400092.

Customer Care No. +91 8104317528

Email : magnetadhesives@gmail.com

Website : www.magnetadhesive.com

Note: The information in this leaflet is given in good faith but without warranty. We recommend that before using our product in full scale production, the customer should make his own test to determine the suitability of the product for his own purpose under his operating conditions. As the circumstances under which our product are stored, handled and used are beyond our control, we cannot assume any responsibility for their use by the customer.



VIDEO

**1ST  
TIME IN  
INDIA**



**MAGICGRIP®**

**BOND**  
"A LASTING VALUE"



**WATERPROOF  
WOOD ADHESIVE**



# Introduction



WE are the manufacturer of the India's most premium quality product.. We welcome all our consumers and customers !!


FOR THE FIRST TIME IN INDIA MAGNET ADHESIVE SOLUTION,THE MANUFACTURER HAS COME UP WITH EXTRA POWER in 13 in 1 concept of wood adhesive.

Wood to Laminate, Veneer, PVC Sheet, Acrylic Sheet, Charcoal Sheet, ACP Sheet, Marble, Granite, Composite Marble, MS, Steel, Glass & Aluminium.

Hold on with a \*Magic Grip\*, and stick and build as much as possible..

The biggest challenge over time is that we stay creative and making sure that we continue to launch awesome products that people love.

# Physical and Chemical Properties

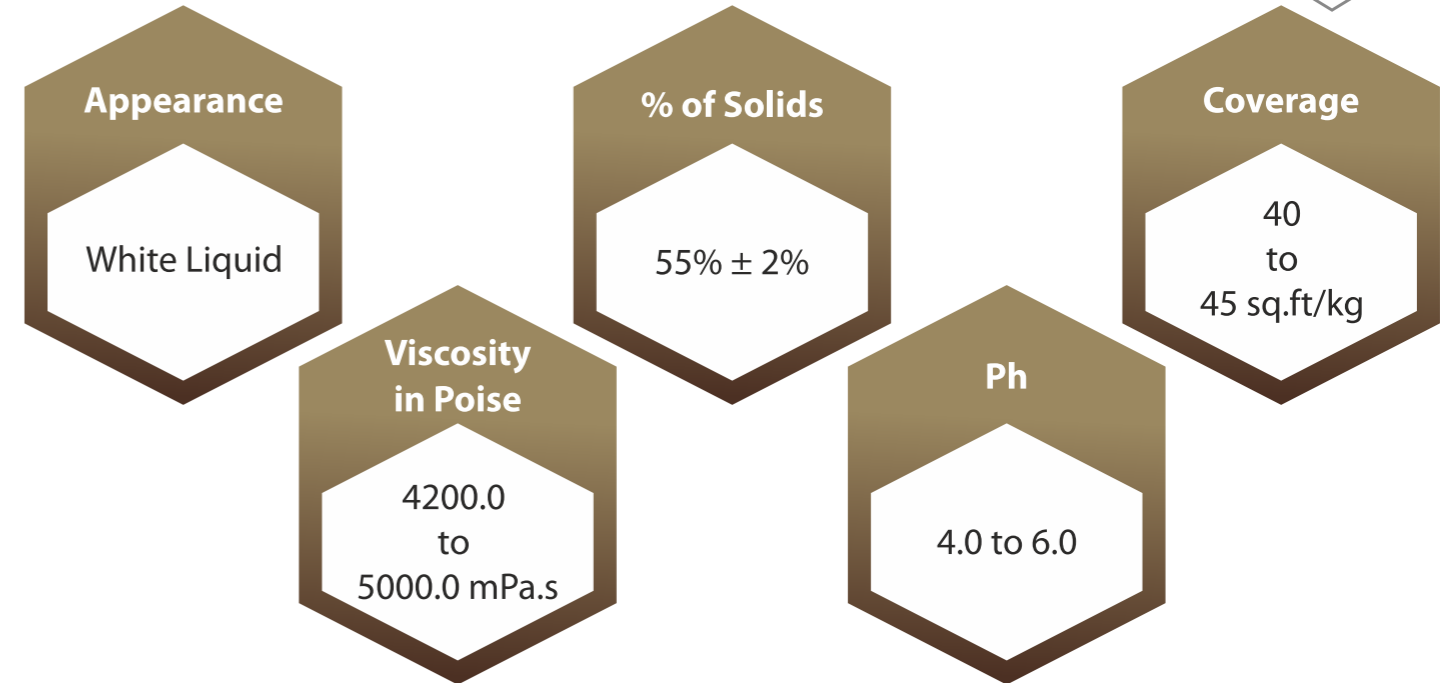

# Method of Application

-  Clean the surface thoroughly with cloth to let it be free of dust, wax and stickers.
-  Stir the glue just before the application. spread the glue uniformly with brush, roller and spreader on both the porous and non - pours surface.
-  Once the glue is spread on the surfaces, bring them in contact and make proper alignment.
-  Press the surface by wet squeezed cloth to remove air bubbles if any.
-  Apply masking tape on the edges with under pressure. bond will be created within 6-8 hrs. full strength achieves in 24 hrs.

